




Guiding sheaths

- Soft atraumatic tip
- Smooth transitions
- Gold coil marker
- Distal hydrophilic coating
- Coil reinforced flexible tubing with PTFE inner liner

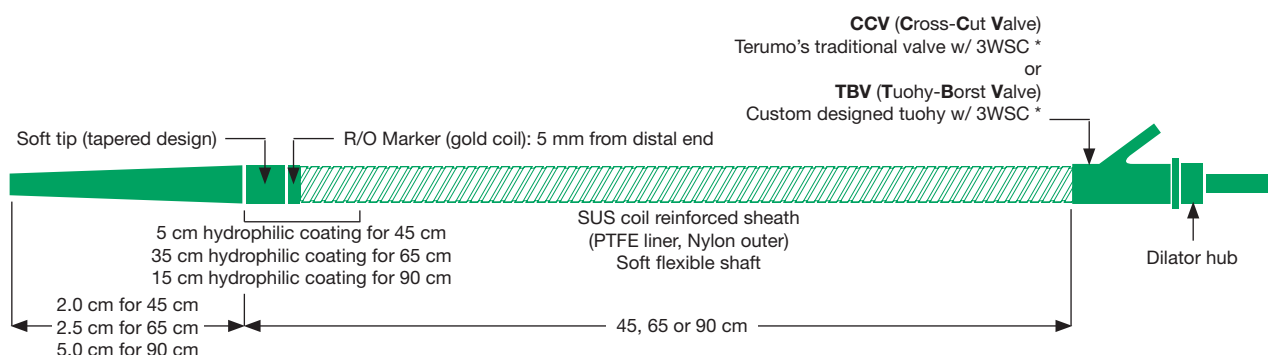

Specifications

Code number	French	Length	Shape	Valve	Inner diameter	Outer diameter
GS*F5ST1C45	5 Fr	45 cm	Straight	CCV **	0.076" / 1,93 mm	0.098" / 2,49 mm
GS*F5HS1C45	5 Fr	45 cm	Hockey stick	CCV **	0.076" / 1,93 mm	0.098" / 2,49 mm
GS*F5MP1C45	5 Fr	45 cm	Multipurpose	CCV **	0.076" / 1,93 mm	0.098" / 2,49 mm
GS*F5RDCC45	5 Fr	45 cm	RDC	CCV **	0.076" / 1,93 mm	0.098" / 2,49 mm
GS*F5LIMC45	5 Fr	45 cm	LIMA	CCV **	0.076" / 1,93 mm	0.098" / 2,49 mm
RSR01	6 Fr	45 cm	Straight	CCV **	0.087" / 2,20 mm	0.109" / 2,77 mm
RSR02	6 Fr	45 cm	Hockey stick	CCV **	0.087" / 2,20 mm	0.109" / 2,77 mm
RSR03	6 Fr	45 cm	Multipurpose	CCV **	0.087" / 2,20 mm	0.109" / 2,77 mm
RSR13	6 Fr	45 cm	RDC	CCV **	0.087" / 2,20 mm	0.109" / 2,77 mm
RSR14	6 Fr	45 cm	LIMA	CCV **	0.087" / 2,20 mm	0.109" / 2,77 mm
RSR04	7 Fr	45 cm	Straight	CCV **	0.100" / 2,54 mm	0.122" / 3,10 mm
RSR05	7 Fr	45 cm	Hockey stick	CCV **	0.100" / 2,54 mm	0.122" / 3,10 mm
RSR06	7 Fr	45 cm	Multipurpose	CCV **	0.100" / 2,54 mm	0.122" / 3,10 mm
RSR15	7 Fr	45 cm	RDC	CCV **	0.100" / 2,54 mm	0.122" / 3,10 mm
RSR16	7 Fr	45 cm	LIMA	CCV **	0.100" / 2,54 mm	0.122" / 3,10 mm
RSP01	6 Fr	65 cm	Straight	CCV **	0.087" / 2,20 mm	0.111" / 2,82 mm
RSP02	7 Fr	65 cm	Straight	CCV **	0.100" / 2,54 mm	0.122" / 3,10 mm
GS*K5ST1T90B	5 Fr	90 cm	Straight	TBV**	0.076" / 1,93 mm	0.098" / 2,50 mm
GS*K5MP1T90B	5 Fr	90 cm	Multipurpose	TBV	0.076" / 1,93 mm	0.098" / 2,50 mm
GS*K5ST1C90B	5 Fr	90 cm	Straight	CCV	0.076" / 1,93 mm	0.098" / 2,50 mm
GS*K5MP1C90B	5 Fr	90 cm	Multipurpose	CCV	0.076" / 1,93 mm	0.098" / 2,50 mm
RSC01	6 Fr	90 cm	Straight	TBV ***	0.087" / 2,20 mm	0.111" / 2,82 mm
RSC03	6 Fr	90 cm	Multipurpose	TBV ***	0.087" / 2,20 mm	0.111" / 2,82 mm
RSC05	6 Fr	90 cm	Straight	CCV **	0.087" / 2,20 mm	0.111" / 2,82 mm
RSC07	6 Fr	90 cm	Multipurpose	CCV **	0.087" / 2,20 mm	0.111" / 2,82 mm
RSC02	7 Fr	90 cm	Straight	TBV ***	0.100" / 2,54 mm	0.122" / 3,10 mm
RSC04	7 Fr	90 cm	Multipurpose	TBV ***	0.100" / 2,54 mm	0.122" / 3,10 mm
RSC06	7 Fr	90 cm	Straight	CCV **	0.100" / 2,54 mm	0.122" / 3,10 mm
RSC08	7 Fr	90 cm	Multipurpose	CCV **	0.100" / 2,54 mm	0.122" / 3,10 mm

All dilators are -0.038" / 0,96 mm wire compatible

Unit per box: 1

* w/3WSC: with 3-way Stopcock

**CCV: Cross-Cut Valve (Terumo's standard sheath valve)


***TBV: Tuohy-Borst Valve (Y-Shape rotating valve)

Muso® WIRE


Stainless steel PTA Guide wires

Stiff shaft body for strong support

Long taper

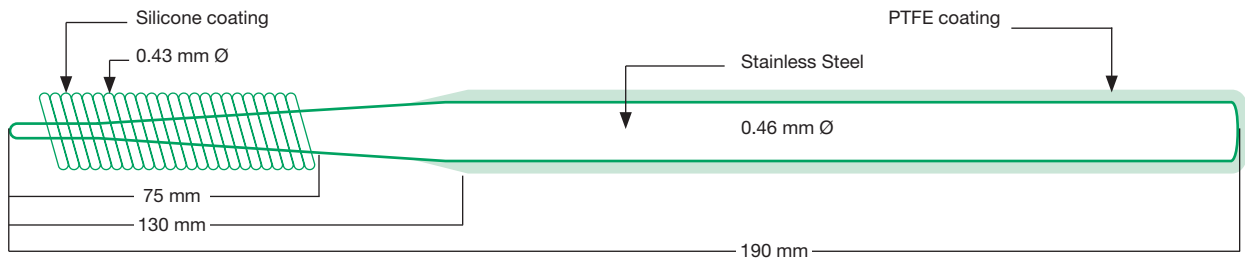

Regular taper

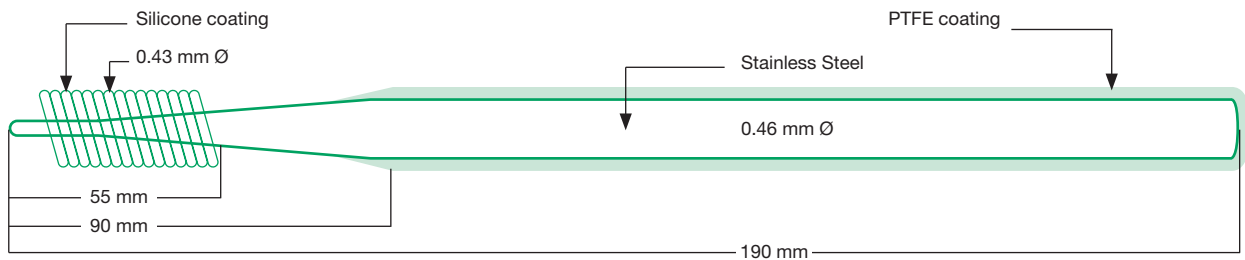


Specifications

Code number	Type	Guide wire Diameter	Guide wire Length	Floppy tapered Tip	Radiopaque spring coil	Shapeable tip shape
PW-SF1819LS	Long taper	0.018" / 0.46 mm	190 cm	13 cm	7.5 cm	Straight
PW-SF1819RS	Regular taper	0.018" / 0.46 mm	190 cm	9 cm	5.5 cm	Straight

Units per box: 5

RX Muso®

PTA dilatation catheters

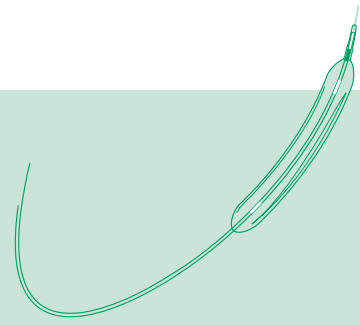

One balloon for all cases


Rapid Exchange 0.014" / 0.018" technology applied for peripheral procedure

RX Muso® PTA dilatation catheter has high-class crossability even in difficult cases. **Hypotube shaft** provides excellent torque and pushability. Coming in sizes from 2.5 mm to 7mm all with dual radiopaque markers, Terumo can now support all interventionalists to make the procedure easier with


RX Muso®, which can be used for all lesions.

Hydrophilic coating on sizes for lower extremities.

0.014" Concept

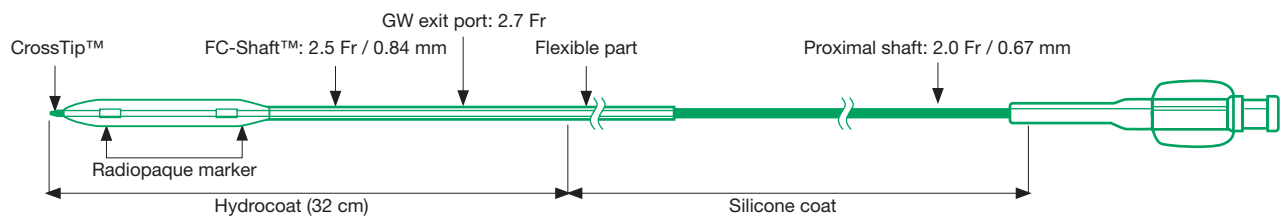

0.018" Concept

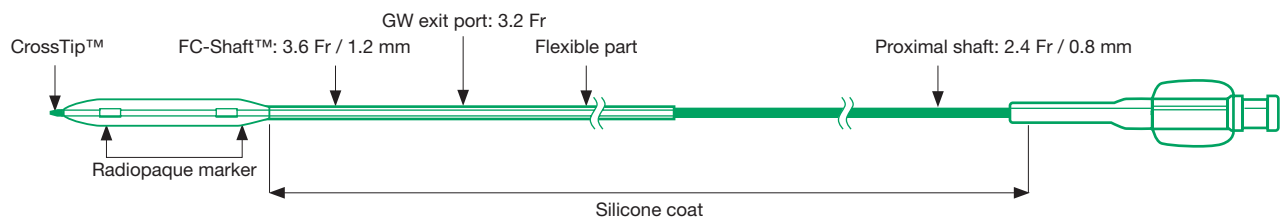

Specifications

Code number	Balloon diameter	Balloon length	Catheter length	Maximum Guide wire size	Crossing profile	Minimum sheath size	Minimum guiding catheter	Nominal pressure	Rated burst pressure
BD-R402009N	4.0 mm	20 mm	90 cm	0.018" / 0.46 mm	0.057"	5 Fr (0.068" / 1.70 mm)	6 Fr (0.067" / 1.70 mm)	6 atm	14 atm
BD-R402015N	4.0 mm	20 mm	150 cm	0.018" / 0.46 mm	0.057"	5 Fr (0.068" / 1.70 mm)	6 Fr (0.067" / 1.70 mm)	6 atm	14 atm
BD-R502009N	5.0 mm	20 mm	90 cm	0.018" / 0.46 mm	0.057"	5 Fr (0.068" / 1.70 mm)	6 Fr (0.067" / 1.70 mm)	6 atm	14 atm
BD-R502015N	5.0 mm	20 mm	150 cm	0.018" / 0.46 mm	0.057"	5 Fr (0.068" / 1.70 mm)	6 Fr (0.067" / 1.70 mm)	6 atm	14 atm
BD-R602009N	6.0 mm	20 mm	90 cm	0.018" / 0.46 mm	0.060"	5 Fr (0.068" / 1.70 mm)	6 Fr (0.067" / 1.70 mm)	4 atm	12 atm
BD-R602015N	6.0 mm	20 mm	150 cm	0.018" / 0.46 mm	0.060"	5 Fr (0.068" / 1.70 mm)	6 Fr (0.067" / 1.70 mm)	4 atm	12 atm
BD-R702009N	7.0 mm	20 mm	90 cm	0.018" / 0.46 mm	0.065"	5 Fr (0.068" / 1.70 mm)	6 Fr (0.067" / 1.70 mm)	4 atm	12 atm
BD-R702015N	7.0 mm	20 mm	150 cm	0.018" / 0.46 mm	0.065"	5 Fr (0.068" / 1.70 mm)	6 Fr (0.067" / 1.70 mm)	4 atm	12 atm


Unit per box: 1

Tsunami® Peripheral

Peripheral stent system

Terumo's Tsunami® Peripheral stent system assures smooth, quick delivery and precise placement, even in severely tortuous lesions.

Rapid exchange technology on 0.018" Guide wire for better support

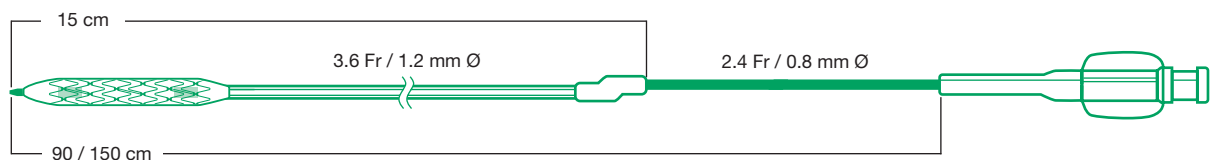

Stent design

- 12 diamond cell unit + triple link connector for 5 and 6 mm
- 14 diamond cell unit + quadruple link connector for 7 mm
- 316L stainless steel
- Non ferromagnetic
- Strut thickness 0.0071" / 0.180 mm

Specifications

Code number	Stent diameter	Stent length	Catheter length	Maximal Guide wire diameter	Crossing profile	Minimum sheath size	Minimum Guiding catheter
CS-AF5012M3	5 mm	12 mm	90 cm	0.018" / 0.46 mm	0.059" / 1.50 mm	5 Fr / 1.7 mm	6 Fr (1.70 mm, 0.067")
CS-AF5018M3	5 mm	18 mm	90 cm	0.018" / 0.46 mm	0.059" / 1.50 mm	5 Fr / 1.7 mm	6 Fr (1.70 mm, 0.067")
CS-AF6012M3	6 mm	12 mm	90 cm	0.018" / 0.46 mm	0.062" / 1.57 mm	5 Fr / 1.7 mm	6 Fr (1.70 mm, 0.067")
CS-AF6018M3	6 mm	18 mm	90 cm	0.018" / 0.46 mm	0.062" / 1.57 mm	5 Fr / 1.7 mm	6 Fr (1.70 mm, 0.067")
CS-AF7012P4	7 mm	12 mm	90 cm	0.018" / 0.46 mm	0.067" / 1.70 mm	6 Fr / 2.0 mm	7 Fr (1.98 mm, 0.078")
CS-AF7018P4	7 mm	18 mm	90 cm	0.018" / 0.46 mm	0.067" / 1.70 mm	6 Fr / 2.0 mm	7 Fr (1.98 mm, 0.078")
CS-AM5012M3	5 mm	12 mm	150 cm	0.018" / 0.46 mm	0.059" / 1.50 mm	5 Fr / 1.7 mm	6 Fr (1.70 mm, 0.067")
CS-AM5018M3	5 mm	18 mm	150 cm	0.018" / 0.46 mm	0.059" / 1.50 mm	5 Fr / 1.7 mm	6 Fr (1.70 mm, 0.067")
CS-AM6012M3	6 mm	12 mm	150 cm	0.018" / 0.46 mm	0.062" / 1.57 mm	5 Fr / 1.7 mm	6 Fr (1.70 mm, 0.067")
CS-AM6018M3	6 mm	18 mm	150 cm	0.018" / 0.46 mm	0.062" / 1.57 mm	5 Fr / 1.7 mm	6 Fr (1.70 mm, 0.067")
CS-AM7012P4	7 mm	12 mm	150 cm	0.018" / 0.46 mm	0.067" / 1.70 mm	6 Fr / 2.0 mm	7 Fr (1.98 mm, 0.078")
CS-AM7018P4	7 mm	18 mm	150 cm	0.018" / 0.46 mm	0.067" / 1.70 mm	6 Fr / 2.0 mm	7 Fr (1.98 mm, 0.078")

Distal shaft = 3.6 Fr / Proximal shaft = 2.4 Fr
 Usable length of catheter : 90 & 150 cm
 Nominal pressure = 8 atm / Rated burst pressure = 12 atm for 5 and 6 mm
 Nominal pressure = 10 atm / Rated burst pressure = 12 atm for 7 mm

Unit per box: 1




Misago®

New generation RX self-expanding stent



- Its special design provides an optimal flexibility, conformability and durability: ideal for long term patency
- The 0.035"/0,89 mm compatible Rapid Exchange catheter technology promotes single operator handling
- A unique delivery system which allows precise and easy stent deployment
- 6 radiopaque markers: easy to place, MRI safe
- Sterilization: EtO

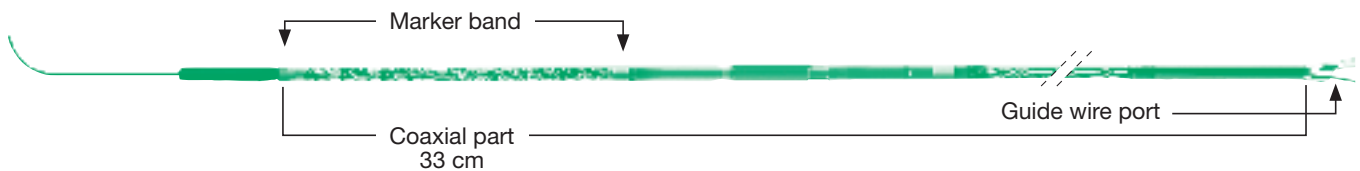

Stent design

- 8 cells + double link connector for 6 mm, 7 mm and 8 mm
- 9 cells + double link connector for 9 mm and 10 mm
- Nitinol alloy
- Strut thickness: 0,185 mm
- Polishing: electrolytic

Specifications

Code number	Stent diameter	Stent length	Catheter length	Maximal Guide wire diameter	Minimum sheath size
SX-VXA0640LN	6 mm	40 mm	135 mm	0.035" / 0,89 mm	6 Fr / 2.0 mm
SX-VXA0660LN	6 mm	60 mm	135 mm	0.035" / 0,89 mm	6 Fr / 2.0 mm
SX-VXA0680LN	6 mm	80 mm	135 mm	0.035" / 0,89 mm	6 Fr / 2.0 mm
SX-VXA06X0LN	6 mm	100 mm	135 mm	0.035" / 0,89 mm	6 Fr / 2.0 mm
SX-VXA0740LN	7 mm	40 mm	135 mm	0.035" / 0,89 mm	6 Fr / 2.0 mm
SX-VXA0760LN	7 mm	60 mm	135 mm	0.035" / 0,89 mm	6 Fr / 2.0 mm
SX-VXA0780LN	7 mm	80 mm	135 mm	0.035" / 0,89 mm	6 Fr / 2.0 mm
SX-VXA07X0LN	7 mm	100 mm	135 mm	0.035" / 0,89 mm	6 Fr / 2.0 mm
SX-VXA0840LN	8 mm	40 mm	135 mm	0.035" / 0,89 mm	6 Fr / 2.0 mm
SX-VXA0860LN	8 mm	60 mm	135 mm	0.035" / 0,89 mm	6 Fr / 2.0 mm
SX-VXA0880LN	8 mm	80 mm	135 mm	0.035" / 0,89 mm	6 Fr / 2.0 mm
SX-VXA08X0LN	8 mm	100 mm	135 mm	0.035" / 0,89 mm	6 Fr / 2.0 mm
SX-VXA0940LN	9 mm	40 mm	135 mm	0.035" / 0,89 mm	6 Fr / 2.0 mm
SX-VXA0960LN	9 mm	60 mm	135 mm	0.035" / 0,89 mm	6 Fr / 2.0 mm
SX-VXA1040LN	10 mm	40 mm	135 mm	0.035" / 0,89 mm	6 Fr / 2.0 mm
SX-VXA1060LN	10 mm	60 mm	135 mm	0.035" / 0,89 mm	6 Fr / 2.0 mm

Unit per box: 1

Delivery system (common to all items) : 6Fr, 135cm, 0.035"/0,89mm guide wire compatible

