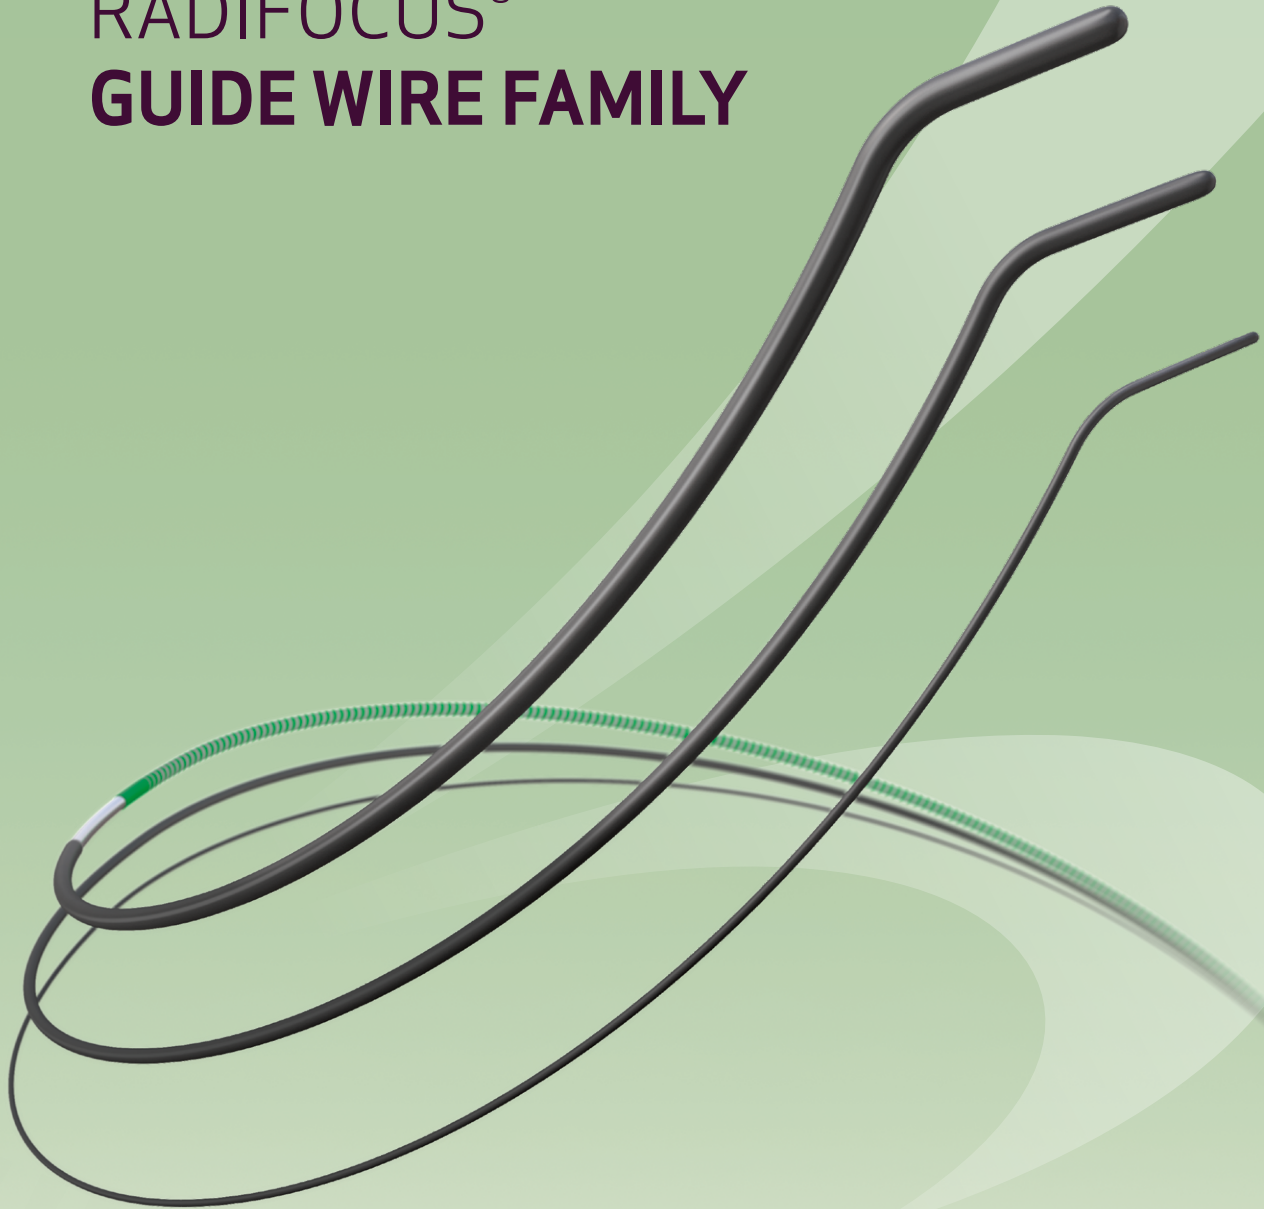


RADIFOCUS® GUIDE WIRE FAMILY



GLIDE WITH **CONFIDENCE**

Not all products are available for sale in all countries. This information is provided only in respect to markets where these products are approved or cleared. All products are not cleared or approved in the U.S.A. by the Food and Drug Administration. Please contact your Terumo local sales representative for more information.




 **TERUMO**
INTERVENTIONAL
SYSTEMS

RADIFOCUS® Guide Wire M

J-Tip

- Nitinol guidewire covered with polyurethane containing tungsten and hydrophilic M Coat™
- Avoids the selection of side branches and minimizes the risk of procedural complications due to small J-shaped atraumatic tip¹

■ ORDERING INFORMATION

Product code	Wire type	Outer diameter	Overall length	Flexible tip length	Tip shape
RF*GR35183M	Standard	0.035" (0.89 mm + 0.01 mm)*	180 cm	3 cm	1.5 mm J-tip 
RF*GR35263M	Standard	0.035" (0.89 mm + 0.01 mm)*	260 cm	3 cm	
RF*HR35183M	Half stiff	0.035" (0.89 mm + 0.01 mm)*	180 cm	3 cm	
RF*HR35303M	Half stiff	0.035" (0.89 mm + 0.01 mm)*	300 cm	3 cm	
RF*HN35183M	Half stiff	0.035" (0.89 mm + 0.01 mm)*	180 cm	3 cm	2.0 mm J-Tip 
RF*GB35153M	Standard	0.035" (0.89 mm + 0.01 mm)*	150 cm	3 cm	3.0 mm J-Tip 



* Nominal OD + upper tolerance, reflecting Maximal OD.

1. Barbeau G. et al. Radial Loop and Extreme Vessel Tortuosity in the Transradial Approach: Advantage of Hydrophilic-Coated Guidewires and Catheters. Catheterization and Cardiovascular Interventions 59:442-450 (2003).

RADIFOCUS® Glidewire Advantage™

- M Coat™ hydrophilic coated polyurethane jacket at distal part provides trackability equal to Radifocus® Guide Wire M
- Extra stiff proximal shaft with spiral PTFE** coating provides good device support and very smooth sliding characteristics¹
- Dedicated to all peripheral intervention levels, from sheath placement to ilio-femoro-popliteal and below-the-knee treatments²

■ ORDERING INFORMATION

Product code	Wire type	Outer diameter	Overall length	Distal hydrophilic coated length	Flexible tip length	Tip shape
RA*FA14181CM	Extra stiff	0.014" (0.36 mm + 0.00 mm)*	180 cm	25 cm	1 cm	45° Angled 
RA*FA14301CM	Extra stiff	0.014" (0.36 mm + 0.00 mm)*	300 cm	25 cm	1 cm	
RA*FA18181CM	Extra stiff	0.018" (0.46 mm + 0.00 mm)*	180 cm	25 cm	1 cm	
RA*FA18301CM	Extra stiff	0.018" (0.46 mm + 0.00 mm)*	300 cm	25 cm	1 cm	
RA*CA35185CM	Extra stiff	0.035" (0.89 mm + 0.00 mm)*	180 cm	25 cm	5 cm	
RA*CA35265CM	Extra stiff	0.035" (0.89 mm + 0.00 mm)*	260 cm	25 cm	5 cm	Straight 
RA*FS14301CM	Extra stiff	0.014" (0.36 mm + 0.00 mm)*	300 cm	25 cm	1 cm	
RA*FS18301CM	Extra stiff	0.018" (0.46 mm + 0.00 mm)*	300 cm	25 cm	1 cm	
RA*CS35185CM	Extra stiff	0.035" (0.89 mm + 0.00 mm)*	180 cm	25 cm	5 cm	
RA*CS35265CM	Extra stiff	0.035" (0.89 mm + 0.00 mm)*	260 cm	25 cm	5 cm	

* Nominal OD + upper tolerance, reflecting Maximal OD.

** PTFE: Polytetrafluoroethylene

1. Compared to Radifocus® Guide Wire M.

2. Lorenzoni et al. Guidewires for lower extremity artery angioplasty: a review. EuroIntervention. 2015;11:799-807.

Not all products are available for sale in all countries. This information is provided only in respect to markets where these products are approved or cleared. All products are not cleared or approved in the U.S.A. by the Food and Drug Administration. Please contact your Terumo local sales representative for more information.

RADIFOCUS® Guide Wire GT

With Gold Coil

- Nitinol guidewire covered with polyurethane containing tungsten and hydrophilic M Coat™ as well as distal 2 cm gold coil
- Small diameters, long-tapered core and distal pre-shaped curves for superselective access of peripheral, coronary and cerebral vasculature

■ ORDERING INFORMATION

Product code	Outer diameter	Overall length	Flexible tip length	Tip shape
RG*GA1218SM	0.012" (0.30 mm + 0.02 mm)*	180 cm	25 cm	Angled 45° x 4 mm
RG*GE1218SM	0.012" (0.30 mm + 0.02 mm)*	180 cm	25 cm	Angled 90° x 4 mm
RG*GW1218SM	0.012" (0.30 mm + 0.02 mm)*	180 cm	25 cm	Double angled 90° + 150°
RG*GA1220SM	0.012" (0.30 mm + 0.02 mm)*	200 cm	25 cm	Angled 45° x 4 mm
RG*GE1220SM	0.012" (0.30 mm + 0.02 mm)*	200 cm	25 cm	Angled 90° x 4 mm
RG*GW1220SM	0.012" (0.30 mm + 0.02 mm)*	200 cm	25 cm	Double angled 90° + 150°
RG*GA1418SM	0.014" (0.36 mm + 0.02 mm)*	180 cm	25 cm	Angled 45° x 4 mm
RG*GE1418SM	0.014" (0.36 mm + 0.02 mm)*	180 cm	25 cm	Angled 90° x 4 mm
RG*GW1418SM	0.014" (0.36 mm + 0.02 mm)*	180 cm	25 cm	Double Angled 90° + 150°
RG*GA1420SM	0.014" (0.36 mm + 0.02 mm)*	200 cm	25 cm	Angled 45° x 4 mm
RG*GE1420SM	0.014" (0.36 mm + 0.02 mm)*	200 cm	25 cm	Angled 90° x 4 mm
RG*GW1420SM	0.014" (0.36 mm + 0.02 mm)*	200 cm	25 cm	Double Angled 90° + 150°
RG*GA1618SM	0.016" (0.41 mm + 0.02 mm)*	180 cm	25 cm	Angled 45° x 4 mm
RG*GA1618FM	0.016" (0.41 mm + 0.02 mm)*	180 cm	35 cm	Angled 45° x 4 mm
RG*GE1618FM	0.016" (0.41 mm + 0.02 mm)*	180 cm	35 cm	Angled 90° x 4 mm
RG*GW1618FM	0.016" (0.41 mm + 0.02 mm)*	180 cm	35 cm	Double angled 90° + 150°
RG*GA1620FM	0.016" (0.41 mm + 0.02 mm)*	200 cm	35 cm	Angled 45° x 4 mm
RG*GE1620FM	0.016" (0.41 mm + 0.02 mm)*	200 cm	35 cm	Angled 90° x 4 mm
RG*GW1620FM	0.016" (0.41 mm + 0.02 mm)*	200 cm	35 cm	Double angled 90° + 150°

* Nominal OD + upper tolerance, reflecting Maximal OD.

1. Barbeau G. et al. Radial Loop and Extreme Vessel Tortuosity in the Transradial Approach: Advantage of Hydrophilic-Coated Guidewires and Catheters. Catheterization and Cardiovascular Interventions 59:442-450 (2003).

Not all products are available for sale in all countries. This information is provided only in respect to markets where these products are approved or cleared. All products are not cleared or approved in the U.S.A. by the Food and Drug Administration. Please contact your Terumo local sales representative for more information.

RADIFOCUS® Guide Wire M

Stiff

- Nitinol guidewire covered with polyurethane containing tungsten and hydrophilic M Coat™
- Stiffer shaft¹ designed for tight, stenotic, tortuous and narrow vessels

ORDERING INFORMATION

Product code	Wire type	Outer diameter	Overall length	Flexible tip length	Tip shape
RF-PA18153M	Stiff	0.020" (0.51 mm + 0.01 mm)*	150 cm	3 cm	Angled 
RF-PA18263M	Stiff	0.020" (0.51 mm + 0.01 mm)*	260 cm	3 cm	
RF-PA25153M	Stiff	0.025" (0.64 mm + 0.00 mm)*	150 cm	3 cm	
RF-PA25183M	Stiff	0.025" (0.64 mm + 0.00 mm)*	180 cm	3 cm	
RF-PA25263M	Stiff	0.025" (0.64 mm + 0.00 mm)*	260 cm	3 cm	
RF-PA35083M	Stiff	0.035" (0.89 mm + 0.01 mm)*	80 cm	3 cm	
RF-PA35151M	Stiff	0.035" (0.89 mm + 0.01 mm)*	150 cm	1 cm	
RF*PA35153M	Stiff	0.035" (0.89 mm + 0.01 mm)*	150 cm	3 cm	
RF*PA35183M	Stiff	0.035" (0.89 mm + 0.01 mm)*	180 cm	3 cm	
RF-PA35263M	Stiff	0.035" (0.89 mm + 0.01 mm)*	260 cm	3 cm	
RF-PA35303M	Stiff	0.035" (0.89 mm + 0.01 mm)*	300 cm	3 cm	
RF-PA38153M	Stiff	0.038" (0.97 mm + 0.02 mm)*	150 cm	3 cm	
RF-PA38183M	Stiff	0.038" (0.97 mm + 0.02 mm)*	180 cm	3 cm	
RF-PA38263M	Stiff	0.038" (0.97 mm + 0.02 mm)*	260 cm	3 cm	
RF-PS25153M	Stiff	0.025" (0.64 mm + 0.00 mm)*	150 cm	3 cm	Straight 
RF-PS35083M	Stiff	0.035" (0.89 mm + 0.01 mm)*	80 cm	3 cm	
RF-PS35153M	Stiff	0.035" (0.89 mm + 0.01 mm)*	150 cm	3 cm	
RF-PS35183M	Stiff	0.035" (0.89 mm + 0.01 mm)*	180 cm	3 cm	
RF-PS35263M	Stiff	0.035" (0.89 mm + 0.01 mm)*	260 cm	3 cm	
RF-PS38083M	Stiff	0.038" (0.97 mm + 0.02 mm)*	80 cm	3 cm	
RF-PS38153M	Stiff	0.038" (0.97 mm + 0.02 mm)*	150 cm	3 cm	
RF-PS38183M	Stiff	0.038" (0.97 mm + 0.02 mm)*	180 cm	3 cm	

* Nominal OD + upper tolerance, reflecting Maximal OD.

1. Compared to Radifocus® Guide Wire M Standard.


Not all products are available for sale in all countries. This information is provided only in respect to markets where these products are approved or cleared. All products are not cleared or approved in the U.S.A. by the Food and Drug Administration. Please contact your Terumo local sales representative for more information.

RADIFOCUS® Guide Wire M

Standard

- Nitinol guidewire covered with polyurethane containing tungsten and hydrophilic M Coat™
- Designed to direct a catheter to the desired anatomical location during peripheral, coronary and cerebral interventions¹

■ ORDERING INFORMATION

Product code	Wire type	Outer diameter	Overall length	Flexible tip length	Tip shape
RF-GA18053M	Standard	0.018" (0.46 mm + 0.02 mm)*	50 cm	3 cm	 Angled
RF-GA18153M	Standard	0.018" (0.46 mm + 0.02 mm)*	150 cm	3 cm	
RF-GA18183M	Standard	0.018" (0.46 mm + 0.02 mm)*	180 cm	3 cm	
RF-GA18223M	Standard	0.018" (0.46 mm + 0.02 mm)*	220 cm	3 cm	
RF-GA18263M	Standard	0.018" (0.46 mm + 0.02 mm)*	260 cm	3 cm	
RF-GA25053M	Standard	0.025" (0.64 mm + 0.00 mm)*	50 cm	3 cm	
RF-GA25123M	Standard	0.025" (0.64 mm + 0.00 mm)*	120 cm	3 cm	
RF-GA25153M	Standard	0.025" (0.64 mm + 0.00 mm)*	150 cm	3 cm	
RF-GA25183M	Standard	0.025" (0.64 mm + 0.00 mm)*	180 cm	3 cm	
RF-GA25263M	Standard	0.025" (0.64 mm + 0.00 mm)*	260 cm	3 cm	
RF-GA32123M	Standard	0.032" (0.81 mm + 0.00 mm)*	120 cm	3 cm	
RF-GA32153M	Standard	0.032" (0.81 mm + 0.00 mm)*	150 cm	3 cm	
RF-GA32183M	Standard	0.032" (0.81 mm + 0.00 mm)*	180 cm	3 cm	
RF-GA32263M	Standard	0.032" (0.81 mm + 0.00 mm)*	260 cm	3 cm	
RF-GA35053M	Standard	0.035" (0.89 mm + 0.01 mm)*	50 cm	3 cm	
RF-GA35083M	Standard	0.035" (0.89 mm + 0.01 mm)*	80 cm	3 cm	
RF-GA35123M	Standard	0.035" (0.89 mm + 0.01 mm)*	120 cm	3 cm	
RF-GA35151M	Standard	0.035" (0.89 mm + 0.01 mm)*	150 cm	1 cm	
RF*GA35153M	Standard	0.035" (0.89 mm + 0.01 mm)*	150 cm	3 cm	
RF-GA35155M	Standard	0.035" (0.89 mm + 0.01 mm)*	150 cm	5 cm	
RF-GA35158M	Standard	0.035" (0.89 mm + 0.01 mm)*	150 cm	8 cm	
RF-GA35181M	Standard	0.035" (0.89 mm + 0.01 mm)*	180 cm	1 cm	
RF*GA35183M	Standard	0.035" (0.89 mm + 0.01 mm)*	180 cm	3 cm	
RF-GA35223M	Standard	0.035" (0.89 mm + 0.01 mm)*	220 cm	3 cm	
RF-GA35261M	Standard	0.035" (0.89 mm + 0.01 mm)*	260 cm	1 cm	
RF*GA35263M	Standard	0.035" (0.89 mm + 0.01 mm)*	260 cm	3 cm	
RF-GA35303M	Standard	0.035" (0.89 mm + 0.01 mm)*	300 cm	3 cm	
RF-GA38151M	Standard	0.038" (0.97 mm + 0.02 mm)*	150 cm	1 cm	
RF*GA38153M	Standard	0.038" (0.97 mm + 0.02 mm)*	150 cm	3 cm	
RF-GA38183M	Standard	0.038" (0.97 mm + 0.02 mm)*	180 cm	3 cm	
RF-GA38223M	Standard	0.038" (0.97 mm + 0.02 mm)*	220 cm	3 cm	
RF-GA38263M	Standard	0.038" (0.97 mm + 0.02 mm)*	260 cm	3 cm	

* Nominal OD + upper tolerance, reflecting Maximal OD.

1. Radifocus® Guide Wire M Standard IFU.


Not all products are available for sale in all countries. This information is provided only in respect to markets where these products are approved or cleared. All products are not cleared or approved in the U.S.A. by the Food and Drug Administration. Please contact your Terumo local sales representative for more information.

RADIFOCUS®

Guide Wire M

Standard

■ ORDERING INFORMATION

Product code	Wire type	Outer diameter	Overall length	Flexible tip length	Tip shape
RF-GS18153M	Standard	0.018" (0.46 mm + 0.02 mm)*	150 cm	3 cm	<div>Straight</div> 
RF-GS18183M	Standard	0.018" (0.46 mm + 0.02 mm)*	180 cm	3 cm	
RF-GS18263M	Standard	0.018" (0.46 mm + 0.02 mm)*	260 cm	3 cm	
RF-GS25123M	Standard	0.025" (0.64 mm + 0.00 mm)*	120 cm	3 cm	
RF-GS25153M	Standard	0.025" (0.64 mm + 0.00 mm)*	150 cm	3 cm	
RF-GS25183M	Standard	0.025" (0.64 mm + 0.00 mm)*	180 cm	3 cm	
RF-GS25263M	Standard	0.025" (0.64 mm + 0.00 mm)*	260 cm	3 cm	
RF-GS32123M	Standard	0.032" (0.81 mm + 0.00 mm)*	120 cm	3 cm	
RF-GS32153M	Standard	0.032" (0.81 mm + 0.00 mm)*	150 cm	3 cm	
RF-GS32183M	Standard	0.032" (0.81 mm + 0.00 mm)*	180 cm	3 cm	
RF-GS32263M	Standard	0.032" (0.81 mm + 0.00 mm)*	260 cm	3 cm	
RF-GS35123M	Standard	0.035" (0.89 mm + 0.01 mm)*	120 cm	3 cm	
RF-GS35151M	Standard	0.035" (0.89 mm + 0.01 mm)*	150 cm	1 cm	
RF*GS35153M	Standard	0.035" (0.89 mm + 0.01 mm)*	150 cm	3 cm	
RF-GS35155M	Standard	0.035" (0.89 mm + 0.01 mm)*	150 cm	5 cm	
RF-GS35158M	Standard	0.035" (0.89 mm + 0.01 mm)*	150 cm	8 cm	
RF-GS35181M	Standard	0.035" (0.89 mm + 0.01 mm)*	180 cm	1 cm	
RF-GS35183M	Standard	0.035" (0.89 mm + 0.01 mm)*	180 cm	3 cm	
RF-GS35223M	Standard	0.035" (0.89 mm + 0.01 mm)*	220 cm	3 cm	
RF-GS35261M	Standard	0.035" (0.89 mm + 0.01 mm)*	260 cm	1 cm	
RF-GS35263M	Standard	0.035" (0.89 mm + 0.01 mm)*	260 cm	3 cm	
RF-GS38153M	Standard	0.038" (0.97 mm + 0.02 mm)*	150 cm	3 cm	
RF-GS38183M	Standard	0.038" (0.97 mm + 0.02 mm)*	180 cm	3 cm	
RF-GS38263M	Standard	0.038" (0.97 mm + 0.02 mm)*	260 cm	3 cm	



* Nominal OD + upper tolerance, reflecting Maximal OD.

RADIFOCUS® Guide Wire M

Non-Vascular

- Nitinol guidewire covered with polyurethane containing tungsten and hydrophilic M Coat™
- For the placement or exchange of devices during non-vascular procedures in endourology and cannulation or insertion of devices into the bile ducts and pancreatic duct¹

■ ORDERING INFORMATION

Product code	Wire type	Outer diameter	Overall length	Flexible tip length	Tip shape
NV-GA18153M	Standard	0.018" (0.46 mm + 0.02 mm)*	150 cm	3 cm	<div>Angled</div> 
NV-GA25153M	Standard	0.025" (0.64 mm + 0.00 mm)*	150 cm	3 cm	
NV-GA32153M	Standard	0.032" (0.81 mm + 0.00 mm)*	150 cm	3 cm	
NV-GA32263M	Standard	0.032" (0.81 mm + 0.00 mm)*	260 cm	3 cm	
NV-GA32403M	Standard	0.032" (0.81 mm + 0.00 mm)*	400 cm	3 cm	
NV-GA35083M	Standard	0.035" (0.89 mm + 0.01 mm)*	80 cm	3 cm	
NV-GA35123M	Standard	0.035" (0.89 mm + 0.01 mm)*	120 cm	3 cm	
NV-GA35153M	Standard	0.035" (0.89 mm + 0.01 mm)*	150 cm	3 cm	
NV-GA35263M	Standard	0.035" (0.89 mm + 0.01 mm)*	260 cm	3 cm	
NV-GA35403M	Standard	0.035" (0.89 mm + 0.01 mm)*	400 cm	3 cm	
NV-GA35453M	Standard	0.035" (0.89 mm + 0.01 mm)*	450 cm	3 cm	
NV-PA18153M	Stiff	0.020" (0.51 mm + 0.01 mm)*	150 cm	3 cm	
NV-PA18453M	Stiff	0.020" (0.51 mm + 0.01 mm)*	450 cm	3 cm	
NV-PA25153M	Stiff	0.025" (0.64 mm + 0.00 mm)*	150 cm	3 cm	
NV-PA25453M	Stiff	0.025" (0.64 mm + 0.00 mm)*	450 cm	3 cm	
NV-PA35153M	Stiff	0.035" (0.89 mm + 0.01 mm)*	150 cm	3 cm	
NV-PA35263M	Stiff	0.035" (0.89 mm + 0.01 mm)*	260 cm	3 cm	
NV-PA35403M	Stiff	0.035" (0.89 mm + 0.01 mm)*	400 cm	3 cm	
NV-GS18153M	Standard	0.018" (0.46 mm + 0.02 mm)*	150 cm	3 cm	<div>Straight</div> 
NV-GS25153M	Standard	0.025" (0.64 mm + 0.00 mm)*	150 cm	3 cm	
NV-GS32153M	Standard	0.032" (0.81 mm + 0.00 mm)*	150 cm	3 cm	
NV-GS32263M	Standard	0.032" (0.81 mm + 0.00 mm)*	260 cm	3 cm	
NV-GS32403M	Standard	0.032" (0.81 mm + 0.00 mm)*	400 cm	3 cm	
NV-GS35123M	Standard	0.035" (0.89 mm + 0.01 mm)*	120 cm	3 cm	
NV-GS35153M	Standard	0.035" (0.89 mm + 0.01 mm)*	150 cm	3 cm	
NV-GS35183M	Standard	0.035" (0.89 mm + 0.01 mm)*	180 cm	3 cm	
NV-GS35263M	Standard	0.035" (0.89 mm + 0.01 mm)*	260 cm	3 cm	
NV-GS35403M	Standard	0.035" (0.89 mm + 0.01 mm)*	400 cm	3 cm	
NV-GS35453M	Standard	0.035" (0.89 mm + 0.01 mm)*	450 cm	3 cm	
NV-GS38153M	Standard	0.038" (0.97 mm + 0.02 mm)*	150 cm	3 cm	
NV-PS18453M	Stiff	0.020" (0.51 mm + 0.01 mm)*	450 cm	3 cm	
NV-PS25453M	Stiff	0.025" (0.64 mm + 0.00 mm)*	450 cm	3 cm	
NV-PS35083M	Stiff	0.035" (0.89 mm + 0.01 mm)*	80 cm	3 cm	
NV-PS35153M	Stiff	0.035" (0.89 mm + 0.01 mm)*	150 cm	3 cm	
NV-PS35183M	Stiff	0.035" (0.89 mm + 0.01 mm)*	180 cm	3 cm	
NV-PS35403M	Stiff	0.035" (0.89 mm + 0.01 mm)*	400 cm	3 cm	
NV-PS38153M	Stiff	0.038" (0.97 mm + 0.02 mm)*	150 cm	3 cm	
NV-PS38183M	Stiff	0.038" (0.97 mm + 0.02 mm)*	180 cm	3 cm	

* Nominal OD + upper tolerance, reflecting Maximal OD.

1. Radifocus® Guide Wire M Non-Vascular IFU.

Not all products are available for sale in all countries. This information is provided only in respect to markets where these products are approved or cleared. All products are not cleared or approved in the U.S.A. by the Food and Drug Administration. Please contact your Terumo local sales representative for more information.